


Silver 50 Xtra

OPTICAL & SOLAR PROPERTIES

	Single Pane	Double Pane
Visible Light Transmitted	48 %	44 %
Visible Light Reflected (Int)	28 %	32 %
Visible Light Reflected (Ext)	27 %	29 %
Ultra Violet Block	99 %	99 %
Total Solar Energy Reflected	30 %	32 %
Total Solar Energy Transmitted	37 %	31 %
Total Solar Energy Absorbed	33 %	37 %
Emissivity (Room Side)	0.84	0.84
Glare Reduction	46 %	45 %
Shading Coefficient	0.53	0.44
Solar Heat Gain Coeff. (G-Value)	0.46	0.38
U-Value Winter (IP)	1.04	0.48
U-Value Winter (SI)	5.91	2.73
Luminous Efficacy	0.90	1.00
Total Solar Energy Rejected	54 %	62 %

R07050X - Silver 50 Xtra Pressure Sensitive Adhesive

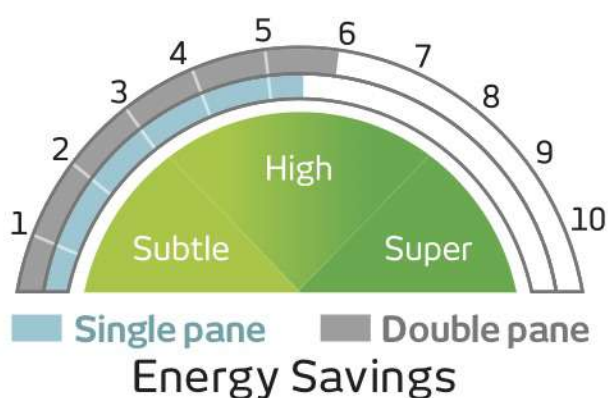

Ed-A DS No 1603 August 2011

Energy efficiency

